

PRODUCT OVERVIEW

The TASCAM CD-160mkII offers a simple, cost effective solution to installations where the extra features of a more complex CD player might go unused. Yet it provides features such as MP3 playback, Pitch



Control with an on/off knob, Headphone Output with Level Control, Intro Check (via the remote control), and a variety of playback modes which can help prevent the user from making a mistake. The wireless remote (included) provides the ability to access the track directly via a 10-key pad and search for a track name during the playback of an MP3 disk.

Its simple...it's reliable!

MSRP \$ 349.00


- | | |
|--|--|
| 2-U Rack-mountable | 40-second anti-shock memory (ESP – Electric Shock Protection) |
| MP3 Playback | Single repeat, all repeat, and folder repeat (Repeat Album) for MP3 discs. |
| Optical and Coaxial Digital Outputs | Single Repeat and all Repeat for Audio CD |
| Intro Check | Shuffle Play and Program Play Modes |
| 12% +/- Pitch Control with on/off switch | Wireless Remote Control (Included) |
| Headphone Output with Level Control | |

ARCHITECT'S SPECIFICATIONS

The TASCAM CD-160mkII is a 19" two-space rack mount single disk player with a powered loading tray. The CD player offers 12% +/- Pitch Control with an on/off knob, a Headphone Output with level control, 40-seconds of ESP (Electronic Shock Protection), Intro Check, and Shuffle, Repeat, and Program Play Modes. It provides Single repeat, all repeat, and folder repeat (Repeat Album) for MP3 discs.

The CD-160mkII is equipped with unbalanced outputs and both Optical and Digital outputs. The CD-160mkII is capable of playing back MP3 files on CD and CD-R/RW CDs. The CD player's Pickup is 3-beam, semiconductor laser with a digital filter of 8x oversampling. Its dimensions (WxDxH) are 18.94 x 3.72 x 11.73. and weighs 9.0 lbs.

PANELS

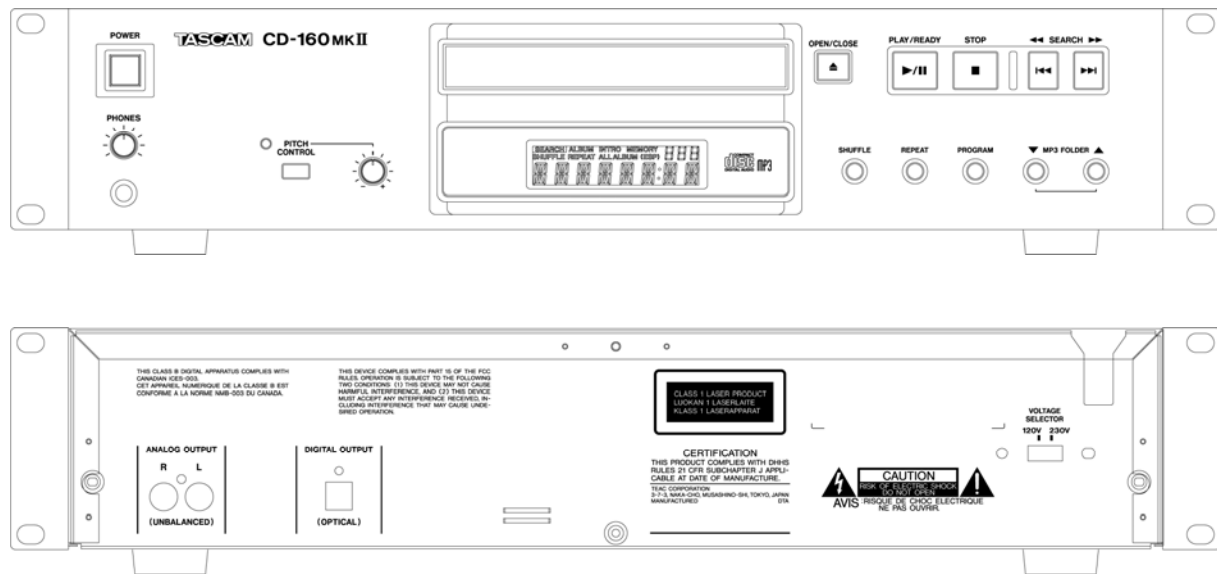

SPECIFICATIONS

Disc type:	8cm and 12cm CD
Applicable Discs:	Audio CD (CD-DA), CD-R, CD-RW CD-ROM (MP3 discs, ISO 9660)
Playback Channels:	2 channels
Quantization:	16-bit liner
Sampling Frequency:	44.1KHz
LINE OUTPUTS	RCA
Maximum output level:	+6dBV (2.0Vrms)
Frequency response:	20 Hz to 20 kHz (+/-2.0dB)
Signal to noise ratio:	> 83dB
Total harmonic distortion:	< 0.03%
Power requirements:	120V / 230V ACV50-60Hz 230V AC 50Hz
Power consumption:	10W
Dimensions (W x H x D):	483 x 100 x 285 (mm)
Weight:	4.1kg